


泥土加圧掘進機の寸法諸元及び本体質量（参考）

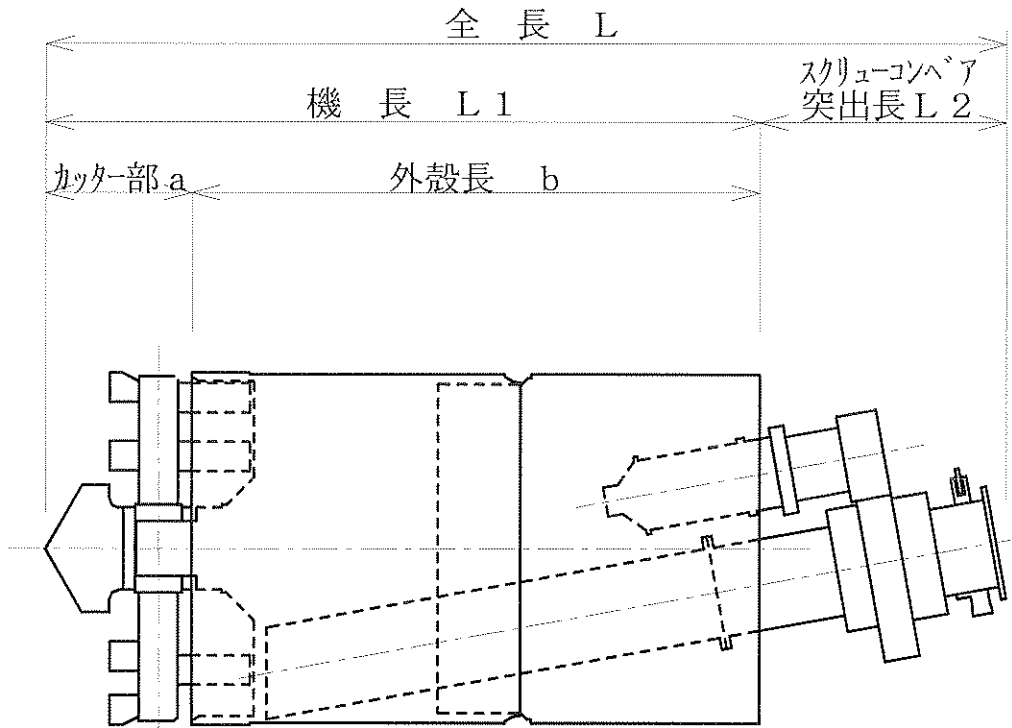

(mm)

呼び径	掘進機 外径 (D)	カッター部 (a)	外殻長 (b)	機長 (L1)	スクリュー コンベア 突出長 (L2)	全長 (L)	分割 最大長	本体質量 (t)	備考
800	960	500	2,200	2,700	700	3,400	1,800	7	↑ 遠隔 操作
900	1,080	500	2,200	2,700	950	3,650	1,800	8	
1,000	1,200	550	2,150	2,700	1,600	4,300	1,800	9	↓
1,100	1,310	550	2,150	2,700	900	3,600	1,800	10	
1,200	1,430	550	2,600	3,150	1,100	4,250	1,800	11	
1,350	1,600	750	2,400	3,150	1,000	4,150	1,800	13	
1,500	1,780	550	2,600	3,150	1,950	5,100	2,000	15	
1,650	1,950	800	2,350	3,150	1,950	5,100	2,200	18	
1,800	2,120	850	2,350	3,200	2,300	5,500	2,400	21	
2,000	2,350	850	2,350	3,200	2,200	5,400	2,400	23	
2,200	2,580	900	2,550	3,450	2,500	5,950	2,500	31	
2,400	2,810	900	2,750	3,650	2,600	6,250	3,200	38	
2,600	3,040	1,100	3,000	4,100	1,400	5,500	3,550	44	
2,800	3,270	1,100	3,000	4,100	1,950	6,050	3,550	48	
3,000	3,500	1,100	3,000	4,100	2,200	6,300	3,550	55	

備考) 呼び径 2,200~3,000 では掘進機を分割して運搬するため、運搬・組立・解体費が必要。